

# SJB NH (New Hinge) Standard, inside

Dimensions: in millimeter


Paper: Illustration printing paper, wood-free, white 170 gr/m<sup>2</sup>

Groove line: Fine line perforation from inside, according to option at producer 2:4 / 2:6 / 2:8 / 2:10

State of material: Plane, back-side bar curved inside max. 10°

EAS tag guidelines: For Sensomatic's guidelines visit [www.sensomatic.com](http://www.sensomatic.com)

Grain direction: As seen on this drawing horizontal.

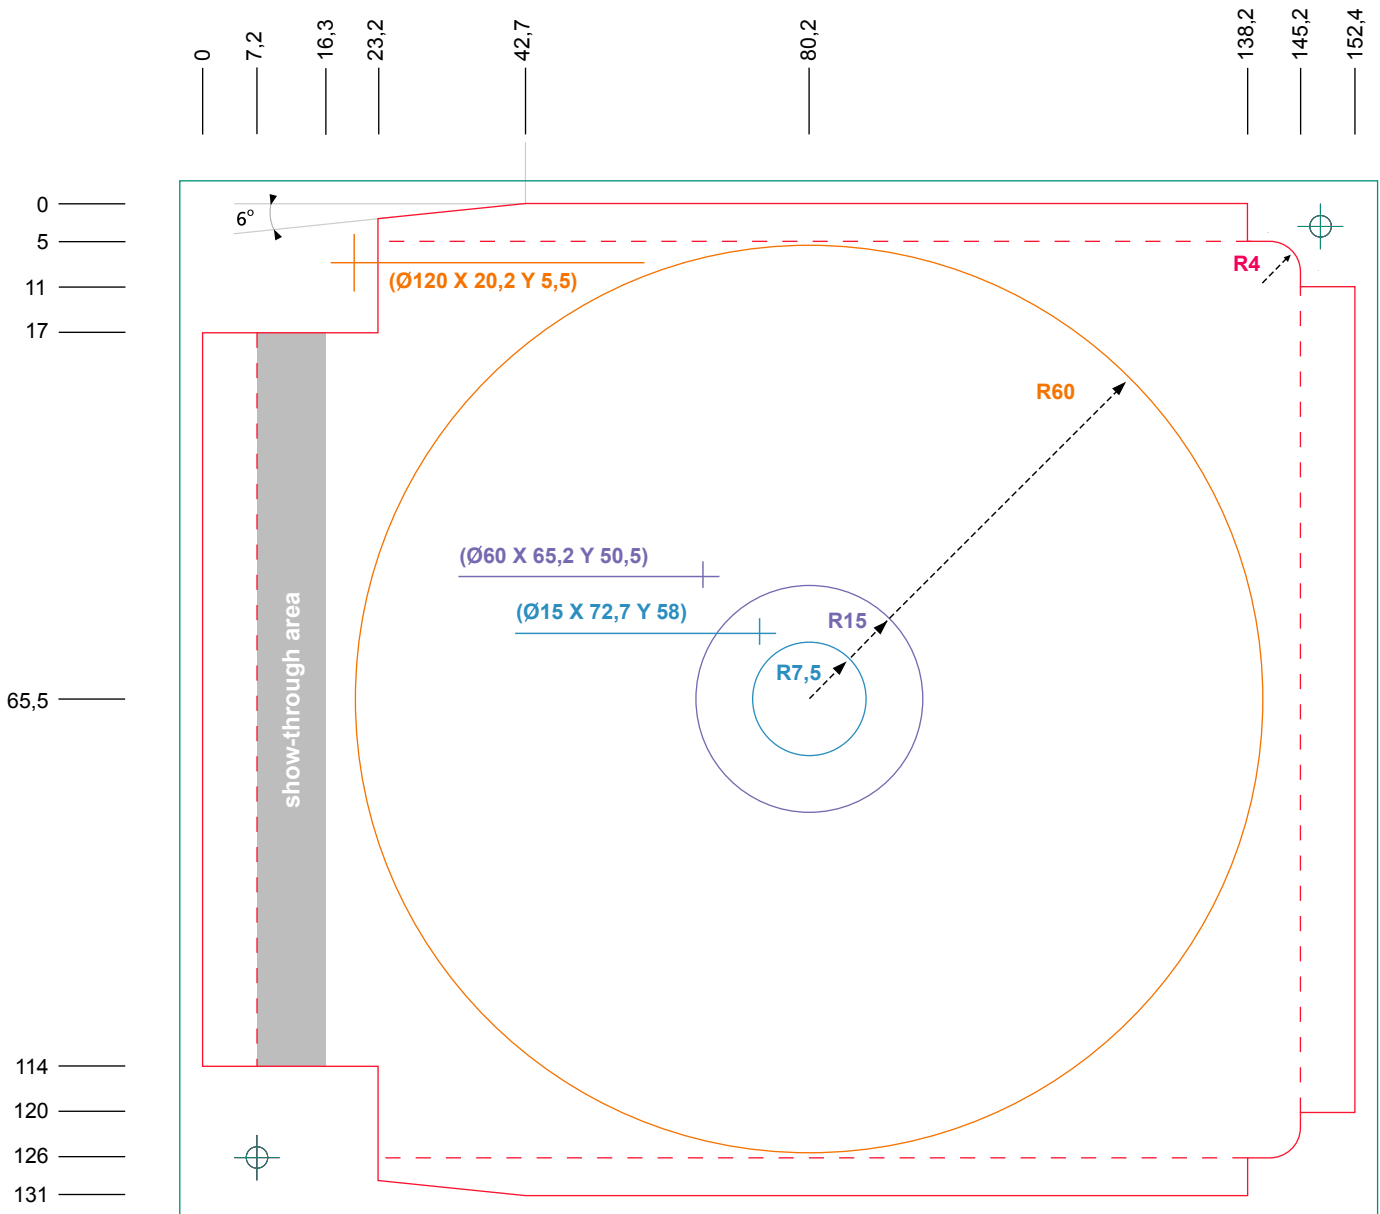

SJB NH Standard inside 140704

Minimal bleed 3mm Dye cut / perforation Outside spindle CD hole Cd position

# SJB NH (New Hinge) Standard, outside

Dimensions: in millimeter


Paper: Illustration printing paper, wood-free, white 170 gr/m<sup>2</sup>

Groove line: Fine line perforation from inside, according to option at producer 2:4 / 2:6 / 2:8 / 2:10

State of material: Plane, back-side bar curved inside max. 10°

EAS tag guidelines: For Sensomatic's guidelines visit [www.sensomatic.com](http://www.sensomatic.com)

Grain direction: As seen on this drawing horizontal.

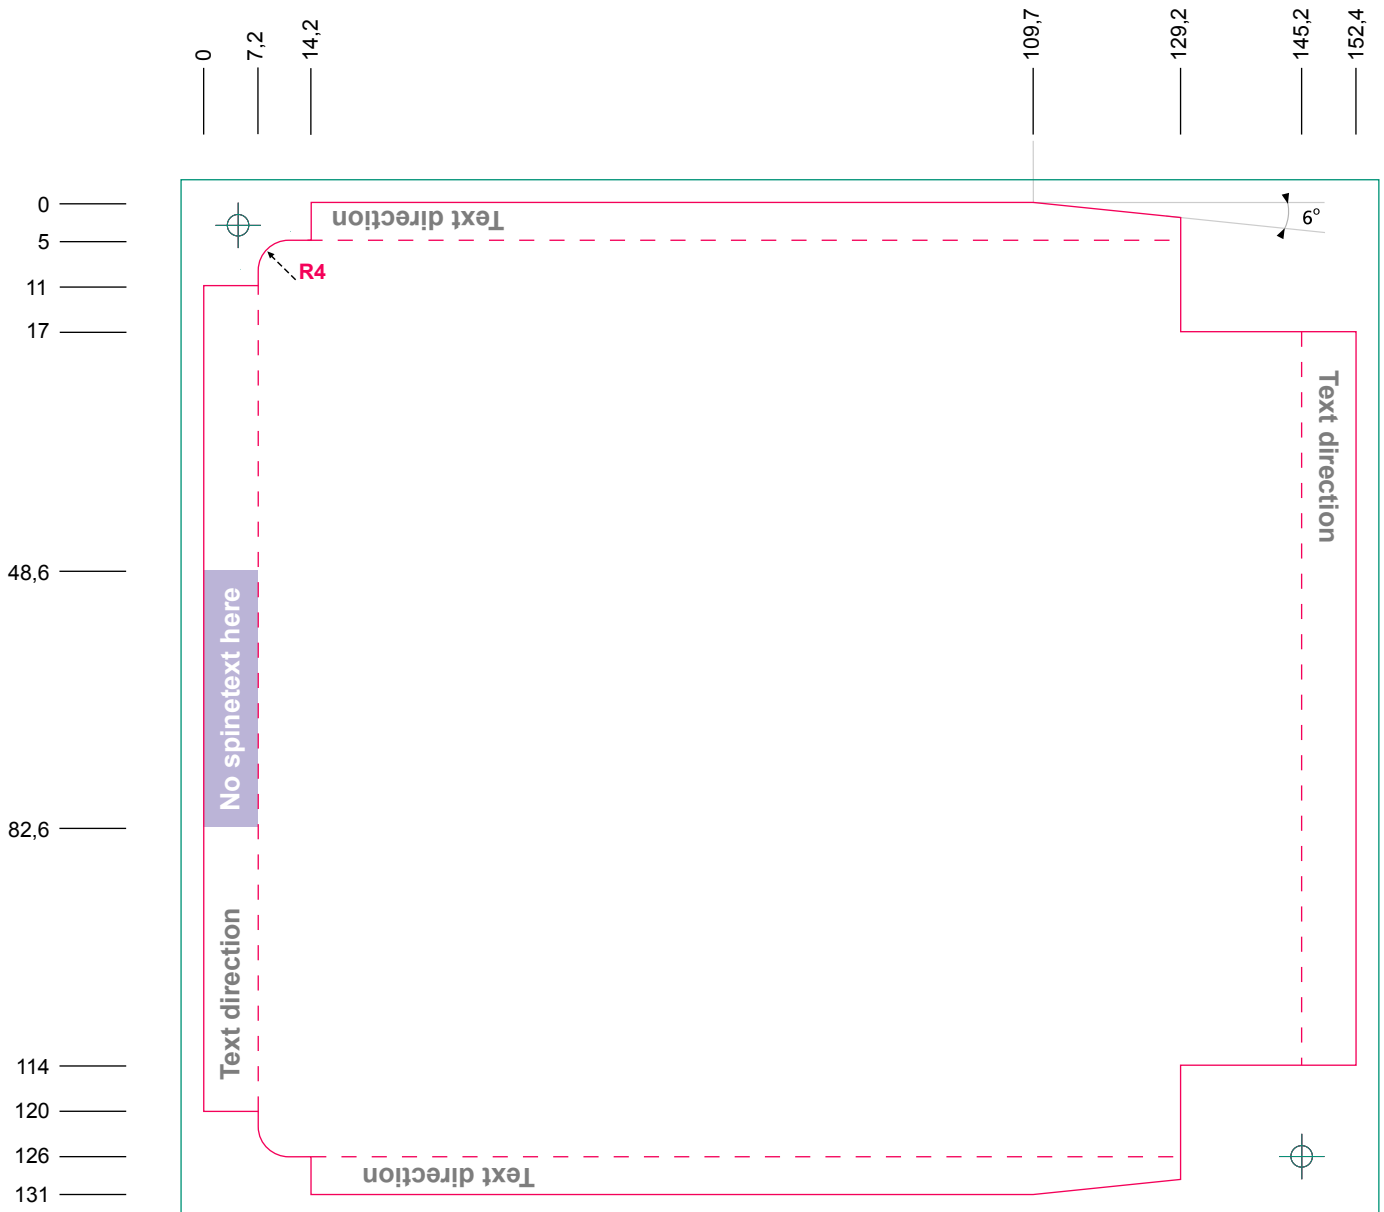

SJB NH Standard outside 140704

Minimal bleed 3mm Dye cut / perforation Locking area